

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 102 249 A1**

(12)

EUROPEAN PATENT APPLICATION

published in accordance with Art. 158(3) EPC

(43) Date of publication:

23.05.2001 Bulletin 2001/21

(21) Application number: 99933163.0

(22) Date of filing: 28.07.1999

(51) Int. Cl.⁷: **G11B 7/007**, G11B 7/00,
G11B 7/24, G11B 19/04,
G11B 20/10

(86) International application number:
PCT/JP99/04083

(87) International publication number:
WO 00/07183 (10.02.2000 Gazette 2000/06)

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

(30) Priority: 29.07.1998 JP 21368598

25.08.1998 JP 23818098

25.08.1998 JP 23818198

(71) Applicant:

MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.
Kadoma-shi, Osaka 571-8501 (JP)

(72) Inventors:

- OKAMOTO, Kojiro
Suita-shi, Osaka 564-0041 (JP)
- SHIMADA, Hiromichi
Hyogo 663-8023 (JP)
- FUKUSHIMA, Yoshihisa
Osaka-shi, Osaka 536-0008 (JP)


(74) Representative:

Grünecker, Kinkeldey,
Stockmair & Schwanhäusser
Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)

(54) REPRODUCING APPARATUS AND RECORDED MEDIUM

(57) There is provided a scheme for copy protection when encrypted main data in a DVD-ROM which is a reproduction-only type optical disk is copied, together with control information including a key information item for decryption in the DVD-ROM and an identification information item indicating that the disk concerned is of a reproduction-only type, into a primary recording region of a DVD-R which is a write-once optical disk. To this end, recorded in a secondary recording region of a DVD-R is control information including an invalid key information item and an identification information indicating that the disk concerned is of a write-once type. In addition, a track in a primary recording region of the DVD-R is wobbled at a specific pitch. In a DVD reproducing apparatus of the invention, an optical pickup (42) is moved in a direction toward the internal periphery of a DVD-R (10) until a wobble detector circuit (70) no longer detects in a tracking error signal (Ste) a signal component having a wobble frequency which is determined by a pitch relating to the wobbling of the track in the primary recording region of the DVD-R and a constant linear velocity. This seeks out genuine control information in the secondary recording region located on the side of the internal periphery of the DVD-R.

Fig. 5

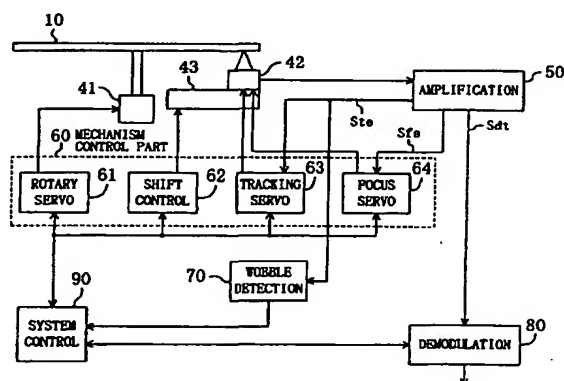

EP 1 102 249 A1

Description

TECHNICAL FIELD

[0001] This invention relates to a disk-shaped recording medium into which a user is able to record a data signal and to a reproducing apparatus for reproducing main data recorded on such a recording medium.

BACKGROUND ART

[0002] As one type of conventional mass-storage recording medium, there are optical disks known as DVDs (Digital Video Disks or Digital Versatile Disks). A DVD-ROM (Read Only Memory) is a reproduction-only type optical disk on which video and audio data of a movie, music, and the like and data such as representing a computer program have been recorded at the time of its manufacture. A DVD-R (Recordable) is a write-once type optical disk onto which a user is able to record a data signal. In the following description, the DVD-ROM is referred to as a ROM disk and the DVD-R is referred to as an R disk.

[0003] If copying of main data recorded on a ROM disk into an R disk is free to carry out, this may cause various problems against copyright laws. Generally, to provide a copy protection scheme, at the time of the manufacture of a ROM disk its main data is encrypted before being recorded in a primary recording region of the ROM disk and key information for decrypting encryption of the main data is recorded in a secondary recording region of the ROM disk located on the side of an internal periphery of the primary recording region. In addition, it is possible to take other countermeasures against unauthorized copying. For example, at the time of the manufacture of an R disk, invalid key information is recorded in a secondary recording region of that R disk and identification information indicating that the disk concerned is not a ROM disk but an R disk is recorded also in the secondary recording region. However, these copy protection schemes are considered not to be thoroughgoing. If encrypted main data on a ROM disk is copied into a primary recording region of an R disk, together with its control information including a key information item and an identification information item indicating that the disk concerned is a ROM disk, it is likely that the copied main data is reproduced by the use of the copied control information in a conventional DVD reproducing apparatus. This is due to the fact that if false control information exists in a primary recording region of an R disk this causes a conventional DVD reproducing apparatus to mistakenly accept such control information prior to seeking out genuine control information in a secondary recording region of the R disk.

DISCLOSURE OF INVENTION

[0004] Accordingly, an object of the present invention is to make it possible to ignore, even when false control information is copied into a primary recording region of a recording medium into which a user is able to record data signals, such false control information, for seeking out genuine control information in a secondary recording region of the recording medium.

[0005] In order to accomplish the object, the present invention provides a disk-shaped recording medium which comprises a primary recording region and a secondary recording region which is located on the side of an internal periphery of the primary recording region. The primary recording region has a track which wobbles at a first pitch, and along which a user is able to record a data signal. On the other hand, the secondary recording region has a track which wobbles at a second pitch different from the first pitch or does not wobble, and along which a signal representative of control information is already prerecorded at the time of the manufacture of the recording medium. Preferably, the control information in the secondary recording region includes an invalid key information item for inhibiting, when encrypted main data is copied into the primary recording region, reproduction of the main data. Further, it is preferred that the control information in the secondary recording region includes an identification information item representative of the type of the recording medium.

[0006] Further, the present invention provides a first reproducing apparatus for the reproduction of main data recorded in the primary recording region with a wobbling track of the foregoing recording medium, the reproducing apparatus comprising means for spinning the recording medium at a constant linear velocity; a pickup for reading a signal from the recording medium under rotation; means by which a signal read position by the pickup follows a track of the recording medium; means for generating a tracking error signal from an output of the pickup; means for shifting the pickup in a direction toward an internal periphery of the recording medium until the pickup reaches a specific point of the secondary recording region at which the tracking error signal no longer contains a signal component having a frequency which is determined by the first pitch relating to the wobbling of the track in the primary recording region and the constant linear velocity, so that even when false control information is copied into the primary recording region the false control information is ignored; and means for starting reproduction of the main data recorded in the primary recording region according to the control information in the secondary recording region represented by an output of the pickup shifted to the point of the secondary recording region.

[0007] Further, the present invention provides a second reproducing apparatus capable of providing an effective copy protection scheme even when a record-

ing medium without a wobbling track in its primary recording region is mounted thereto. The second reproducing apparatus, which is for reproducing, from a disk-shaped recording medium comprising (a) a primary recording region into which a user is able to record a data signal and (b) a secondary recording region which is located on the side of an internal periphery of the primary recording region and into which a signal representative of control information is already prerecorded at the time of the manufacture of the recording medium, main data recorded in the primary recording region, comprises a pickup for reading a signal from the recording medium; means for shifting the pickup in a direction toward an internal periphery of the recording medium until the pickup reaches its shift limit point; and means for starting reproduction of the main data recorded in the primary recording region according to the control information in the secondary recording region obtained finally from an output of the pickup during shifting of the pickup, so that even when false control information is copied into the primary recording region the false control information is ignored.

[0008] According to the first and the second reproducing apparatus of the present invention, even when false control information is copied into a primary recording region of a recording medium into which a user is able to record data signals, it is possible to seek out genuine control information in a secondary recording region of the recording medium. This provides an effective copy protection scheme. For example, control information in the secondary recording region includes an invalid key information item for inhibition of reproduction of encrypted main data, so that when main data copied and recorded in the primary recording region is encrypted its reproduction can be canceled according to the invalid key information item. Further, control information in the secondary recording region includes an identification information item representative of the type of the recording medium, so that when the identification information item indicates that recording of a data signal into the primary recording region by a user is possible and, in addition, main data recorded in the primary recording region is encrypted, it is possible to cancel reproduction of the main data. However, in the case main data recorded in the primary recording region is not encrypted, it is possible to continue reproduction of the main data.

BRIEF DESCRIPTION OF DRAWINGS

[0009]

Figure 1 is a perspective view of an optical disk showing one example of a recording medium according to the present invention.

Figure 2 is a partly enlarged plan view of a track in a primary recording region in Figure 1.

Figure 3 is a partly enlarged plan view of a track in

a secondary recording region in Figure 1.

Figure 4 is a diagram showing a variation of Figure 3.

Figure 5 is a circuit block diagram showing a construction example of a DVD reproducing apparatus according to the present invention, with an optical disk of Figure 1 mounted thereto.

Figure 6 is a waveform diagram of a tracking error signal when the primary recording region in Figure 1 is being scanned with a light beam.

Figure 7 is a conceptual diagram showing one example of a data structure in the optical disk of Figure 1.

Figure 8 is a circuit block diagram showing a construction example of another DVD reproducing apparatus of the present invention.

BEST MODE FOR CARRYING OUT THE INVENTION

[0010] Embodiments of the present invention will be described with reference to the accompanying drawings.

[0011] Figure 1 shows an optical disk which is one example of a recording medium according to the present invention. The optical disk 10 of Figure 1 is a DVD-R, i.e., an R disk. The optical disk 10 comprises a clamping region defined around the periphery of a center hole of the optical disk 10 and, in an area of the optical disk 10 not occupied by the clamping region, a primary recording region 20 and a secondary recording region 30 located on the side of an internal periphery of the primary recording region 20.

[0012] Figure 2 is a partly enlarged plan view of a track in the primary recording region 20 in Figure 1. The primary recording region 20 has a track 21 formed of a groove which wobbles at a pitch P1, and a user is able to record a data signal by formation of information pits 22 along the track 21. The degree of wobbling of the track 21 can be expressed by the number of wobbles (N) with respect to a prescribed track length (L). For example, the number of wobbles is eight for a prescribed track length of 218.7 μm . In other words, the pitch P1 of the track 21 is about 27.3 μm .

[0013] Figure 3 is a partly enlarged plan view of a track in the secondary recording region 30 in Figure 1. The secondary recording region 30 has a track 31 formed of a groove which wobbles at a pitch P2 different from the wobble pitch P1 of the track 21 in the primary recording region 20, and information pits 32 are formed along the track 31 to record a signal representative of control information at the time of the manufacture of the R disk 10. The control information in the secondary recording region 30 includes an invalid key information item for inhibiting, when encrypted main data is copied into the primary recording region 20, reproduction of the main data and an identification information item indicating that the disk 10 is an R disk. In the example shown in Figure 3, the wobble pitch P2 of the track 31 is set

greater than the wobble pitch P1 of the track 21.

[0014] Reference is now made to Figure 4 which shows a variation of Figure 3. It suffices for the track 31 in the secondary recording region 30 to be distinguishable from the wobbling track 21 in the primary recording region 20, so that the track 31 does not necessarily have to wobble, as not all of the tracks in a DVD-ROM (i.e., a ROM disk) wobble.

[0015] Figure 5 is a circuit block diagram illustrating an construction example of a DVD reproducing apparatus according to the present invention with the R disk 10 of Figure 1 mounted thereto. As will, be described later, a ROM disk may be mounted to the DVD reproducing apparatus of Figure 5 instead of the R disk 10.

[0016] The DVD reproducing apparatus of Figure 5 comprises a spindle motor 41 for spinning the R disk 10, an optical pickup 42 for scanning the R disk 10 under rotation with a light beam and reading a signal from the R disk 10, and a slider 43 for shifting the optical pickup 42 in the radial direction of the R disk 10. The apparatus of Figure 5 further includes an amplifier 50, a mechanism controller part 60, a wobble detector circuit 70, a demodulator circuit 80, and a system controller circuit 90. The mechanism controller part 60 is constructed of a rotary servo circuit 61, a shift controller circuit 62, a tracking servo circuit 63, and a focus servo circuit 64.

[0017] The rotary servo circuit 61 controls the number of revolutions of the spindle motor 41 according to instructions from the system controller circuit 90 so that the R disk 10 spins at a constant linear velocity (CLV). The shift controller circuit 62 controls the slider 43 according to instructions from the system controller circuit 90 so that the optical pickup 42 is shifted in the radial direction of the R disk 10. The amplifier 50 amplifies an output of the optical pickup 42. In addition to this, the amplifier 50 has a function of performing addition/subtraction operations on a plurality of sensor signals forming an output of the optical pickup 42 thereby to generate a tracking error signal Ste and a focus error signal Sfe and a function of binarizing a modulated output of the optical pickup 42 thereby to generate a data detection signal Sdt. The tracking error signal Ste is provided to the tracking servo circuit 63 and to the wobble detector circuit 70, the focus error signal Sfe is provided to the focus servo circuit 64, and the data detection signal Sdt is provided to the demodulator circuit 80. The tracking servo circuit 63 controls the optical pickup 42 so that the position at which the optical pickup 42 reads a signal (i.e., the light beam irradiation point) follows the tracks 21 and 31 of the R disk 10, thereby to reduce the tracking error signal Ste. The wobble detector circuit 70 detects a signal for a frequency component which is contained in the tracking error signal Ste due to the wobbling of the track 21 and/or the track 31 and the detection result is sent to the system controller circuit 90. The focus servo circuit 64 controls vertical movement of the optical pickup 42 so that a light beam is focused to the R disk 10, thereby to reduce the focus

error signal Sfe. The demodulator circuit 80 is a circuit operable to demodulate the data detection signal Sdt to obtain main data and control information. The control information thus obtained is sent to the system controller circuit 90. The system controller circuit 90 is a circuit operable to control the entirety of the DVD reproducing apparatus of Figure 5.

[0018] Figure 6 is a waveform diagram of the tracking error signal Ste when the primary recording region 20 in Figure 1 is being scanned with a light beam. The tracking error signal Ste contains a signal component having a wobble frequency F1 according to the wobble pitch P1 of the track 21 in the primary recording region 20. This is because the frequency characteristic of the tracking servo circuit 63 is set such that the tracking servo circuit 63 does not have a gain sufficient enough to enable the light beam to follow the wobbling track 21 at the wobble frequency F1. The wobble frequency F1 can be defined by the number of wobbles per second when the wobbling track 21 is scanned at a constant linear velocity V, as expressed below.

$$F1 = (N/L) \times V = V/P1$$

In other words, the wobble frequency F1 is determined by the wobble pitch P1 of the track 21 and the constant linear velocity V. Here, if $V = 3.84$ m/s, then $F1 = 140$ kHz for the above-described example (in which $L = 218.7$ μ m and $N = 8$).

[0019] The tracking error signal Ste when the secondary recording region 30 is being scanned with a light beam contains a signal component having a wobble frequency F2 lower than the wobble frequency F1 if the track 31 in the secondary recording region 30 wobbles at the pitch P2 ($P2 > P1$) as shown in Figure 3. If the track 31 in the secondary recording region 30 does not wobble as shown in Figure 4, this enables the light beam to accurately follow the track 31 and, as a result, the tracking error signal Ste becomes zero.

[0020] The system controller circuit 90 in Figure 5 issues instructions to the shift controller circuit 62, thereby to make it possible to shift the optical pickup 42 in a direction toward an internal periphery of the R disk 10 until the optical pickup 42 reaches a specific point of the secondary recording region 30 at which the tracking error signal Ste no longer contains a signal component having the wobble frequency F1, so that even when false control information is copied into the primary recording region 20 such false control information is ignored. Further, the system controller circuit 90 issues instructions to the demodulator circuit 80, thereby to make it possible to start, according to control information in the secondary recording region 30 represented by an output of the optical pickup 42 shifted up to the point of the secondary recording region 30, reproduction of main data recorded in the primary recording region 20. In the case main data recorded in the primary recording region 20 of the R disk 10 is not encrypted,

reproduction of the main data will continue, so that the main data recorded on the R disk 10 can be reproduced by the DVD reproducing apparatus of Figure 5.

[0021] Reference is now made to Figure 7 which shows one example of a data structure in the R disk 10 of Figure 1. More detailedly, Figure 7 shows a state in which encrypted main data DATA-ROM on a ROM disk (not shown) is copied into the primary recording region 20 of the R disk 10 together with control information including a key information item KEY-ROM on the ROM disk and an identification information item ID-ROM indicating that the disk concerned is a ROM disk. As described above, the main data DATA-ROM, the false control information items KEY-ROM and ID-ROM are recorded along the track 21 which wobbles at the pitch P1 in the primary recording region 20. On the other hand, control information including an invalid key information item KEY-R for inhibition of reproduction of the copied main data DATA-ROM and an identification information item ID-R indicating that the disk 10 is an R disk is recorded at the time of the manufacture of the R disk 10. These genuine control information items KEY-R and ID-R are recorded along the track 31 in the secondary recording region 30 which wobbles at the pitch P2 or does not wobble.

[0022] The operation of the DVD reproducing apparatus of Figure 5 with the R disk 10 having a data structure as shown in Figure 7 mounted thereto will be described. The initial position of the optical pickup 42 is the read position of the main data DATA-ROM. The initial position of the optical pickup 42 is the position where the rotary servo circuit 61, the tracking servo circuit 63, and the focus servo circuit 64 start operating. The system controller circuit 90 issues instructions to the shift controller circuit 62 so as to shift the optical pickup 42 in a direction toward the internal periphery of the R disk 10 until certain control information is found out. In this way, the optical pickup 42 arrives at the false control information items KEY-ROM and ID-ROM. However, the wobble detector circuit 70 detects a signal component having the wobble frequency F1 in the tracking error signal Ste and the detection result is sent to the system controller circuit 90. As a result, the system controller circuit 90 issues instructions to the shift controller circuit 62 so that the optical pickup 42 is further shifted toward the internal periphery of the R disk 10 until the next control information is found out. In this way, the optical pickup 42 finally arrives at the genuine control information items KEY-R and ID-R. The tracking error signal Ste at this point of time does not contain any signal component having the wobble frequency F1, so that these genuine control information items KEY-R and ID-R are accepted by the system controller circuit 90. Thereafter, the system controller circuit 90 issues to the shift controller circuit 62 instructions so that the optical pickup 42 is shifted in a direction toward the external periphery of the R disk 10 to the location of the main data DATA-ROM.

[0023] It is possible to tell whether the main data is encrypted or not from a flag which is located at the head of each divided section of the main data. In the example shown in Figure 7, the main data DATA-ROM is encrypted, so that the demodulator circuit 80 is unable to decrypt encryption of the main data even if the invalid key information item KEY-R is used. In other words, the system controller circuit 90 is able to cancel, when main data recorded in the primary recording region 20 is encrypted, reproduction of the main data by the demodulator circuit 80 according to the invalid key information item KEY-R. In this case, recording of the identification information item ID-R into the secondary recording region 30 may be omitted.

[0024] Further, the identification information item ID-R may be utilized for copy protection. That is to say, the system controller circuit 90 is able to cancel, when the identification information item indicates that the disk 10 concerned is an R disk and, in addition, the main data recorded in the primary recording region 20 is encrypted, reproduction of the main data by the demodulator circuit 80. In this case, recording of the invalid key information item KEY-R into the secondary recording region 30 may be omitted.

[0025] As described above, it is possible to mount to the DVD reproducing apparatus of Figure 5 a ROM disk in place of the R disk 10. Here, encrypted main data is recorded in a primary recording region of the ROM disk, and control information including a key information item for decrypting the encryption and an identification information item indicating that the disk concerned is a ROM disk is recorded in a secondary recording region of the ROM disk. However, none of the tracks in the primary and secondary recording regions wobbles. The DVD reproducing apparatus of Figure 5 facilitates seeking out genuine control information in the secondary recording region of the ROM disk. The tracking error signal Ste at this point in time does not contain any signal component having the wobble frequency F1, so that the genuine control information found out is accepted by the system controller circuit 90. The demodulator circuit 80 is able to decrypt encryption of the main data by the use of the genuine key information.

[0026] As described above, according to the DVD reproducing apparatus of Figure 5, it is possible to seek out genuine control information, even when an R disk having a primary recording region with false control information copied therein is mounted, or even when a conventional ROM disk is mounted. This provides an effective copy protection scheme and there is no interference with normal reproduction.

[0027] Reference is made to Figure 8 which illustrates a construction example of a DVD reproducing apparatus according to the present invention. In Figure 8, reference numeral 10 denotes an R disk having a primary recording region into which a user is able to record a data signal and a secondary recording region which is located on the side of the internal periphery of the pri-

mary recording region and into which a signal representative of control information is already prerecorded at the time of the manufacture of the R disk 10. The R disk 10 does not necessarily have a wobbling track in the primary recording region.

[0028] The DVD reproducing apparatus of Figure 8 is provided with a search controller circuit 75 in place of the wobble detector circuit 70 of Figure 5. The search controller circuit 75 issues to the shift controller circuit 62 instructions thereby to shift the optical pickup 42 toward the internal periphery of the R disk 10 until the optical pickup 42 reaches its shift limit point, for searching the R disk 10 for every control information recorded therein. That the optical pickup 42 is shifted to the shift limit point is detected by the system controller circuit 90, for example, from the fact that a signal read by the optical pickup 42 stays unchanged. At this point in time, the system controller circuit 90 instructs the search controller circuit 75 not to conduct further searches. Further, it is arranged such that the system controller circuit 90 starts reproduction of the main data recorded in the primary recording region according to the control information in the secondary recording region obtained finally from an output of the optical pickup 42 during shifting of the optical pickup 42, so that even when false control information is copied into the primary recording region of the R disk 10 such false control information is ignored.

[0029] According to the DVD reproducing apparatus of Figure 8, as in the case of Figure 5, even when an R disk having a primary recording region with false control information copied therein is mounted, or even when a conventional ROM disk is mounted, it is possible to seek out genuine control information. This provides an effective copy protection scheme and there is no interference with normal reproduction.

INDUSTRIAL APPLICABILITY

[0030] According to the present invention, even when false control information is copied into a primary recording region of a recording medium into which a user is able to record data signals, such false control information is ignored and genuine control information in a secondary recording region of the recording medium is found out. This accordingly provides an improved DVD reproducing apparatus capable of providing an effective copy protection scheme.

Claims

1. A disk-shaped recording medium comprising a primary recording region and a secondary recording region which is located on the side of an internal periphery of said primary recording region, wherein said primary recording region has a track which wobbles at a first pitch, and along which a user is able to record a data signal; and

wherein said secondary recording region has a track which wobbles at a second pitch different from said first pitch or does not wobble, and along which a signal representative of control information is already prerecorded at the time of the manufacture of said recording medium.

2. The recording medium of claim 1, wherein said control information in said secondary recording region includes an invalid key information item for inhibiting, when encrypted main data is copied into said primary recording region, reproduction of said main data.
3. The recording medium of claim 1, wherein said control information in said secondary recording region includes an identification information item representative of the type of said recording medium.
4. A reproducing apparatus for the reproduction of main data recorded in said primary recording region of said claim 1 recording medium, said reproducing apparatus comprising:

means for spinning said recording medium at a constant linear velocity;

a pickup for reading a signal from said recording medium under rotation;

means by which a signal read position by said pickup follows said tracks of said recording medium;

means for generating a tracking error signal from an output of said pickup;

means for shifting said pickup in a direction toward an internal periphery of said recording medium until said pickup reaches a specific point of said secondary recording region at which said tracking error signal no longer contains a signal component having a frequency which is determined by said first pitch relating to the wobbling of said track in said primary recording region and said constant linear velocity, so that even when false control information is copied into said primary recording region said false control information is ignored; and

means for starting reproduction of said main data recorded in said primary recording region according to said control information in said secondary recording region represented by an output of said pickup shifted to said point of said secondary recording region.

5. The reproducing apparatus of claim 4, wherein said control information in said secondary recording region includes an invalid key information item for inhibiting, when encrypted main data is

copied into said primary recording region, reproduction of said main data; and
 wherein said reproducing apparatus further comprises means for canceling, when main data recorded in said primary recording region is encrypted, reproduction of said main data according to said invalid key information item.

6. The reproducing apparatus of claim 4, wherein said control information in said secondary recording region includes an identification information item representative of the type of said recording medium; and wherein said reproducing apparatus further comprises means for canceling, when said identification information item indicates that recording of a data signal into said primary recording region by a user is possible and, in addition, main data recorded in said primary recording region is encrypted, reproduction of said main data.

7. The reproducing apparatus of claim 4 further comprising means for continuing, when main data recorded in said primary recording region is not encrypted, reproduction of said main data.

8. A reproducing apparatus for reproducing, from a disk-shaped recording medium comprising (a) a primary recording region into which a user is able to record a data signal and (b) a secondary recording region which is located on the side of an internal periphery of said primary recording region and into which a signal representative of control information is already prerecorded at the time of the manufacture of said recording medium, main data recorded in said primary recording region,

said reproducing apparatus comprising:
 a pickup for reading a signal from said recording medium;
 means for shifting said pickup in a direction toward an internal periphery of said recording medium until said pickup reaches its shift limit point; and
 means for starting reproduction of said main data recorded in said primary recording region according to said control information in said secondary recording region obtained finally from an output of said pickup during shifting of said pickup, so that even when false control information is copied into said primary recording region said false control information is ignored.

9. The reproducing apparatus of claim 8, wherein said control information in said secondary recording region includes an invalid key information item for inhibiting, when encrypted main data is

copied into said primary recording region, reproduction of said main data; and
 wherein said reproducing apparatus further comprises means for canceling, when main data recorded in said primary recording region is encrypted, reproduction of said main data according to said invalid key information item.

10. The reproducing apparatus of claim 8, wherein said control information in said secondary recording region includes an identification information item representative of the type of said recording medium; and wherein said reproducing apparatus further comprises means for canceling, when said identification information item indicates that recording of a data signal into said primary recording region by a user is possible and, in addition, main data recorded in said primary recording region is encrypted, reproduction of said main data.

11. The reproducing apparatus of claim 8 further comprising means for continuing, when main data recorded in said primary recording region is not encrypted, reproduction of said main data.

Fig. 1

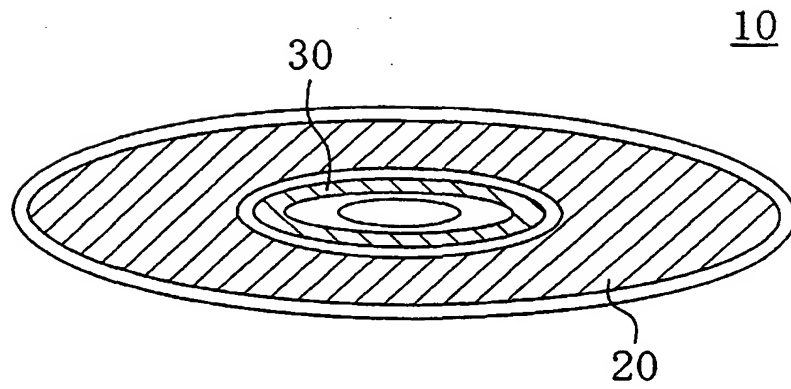


Fig. 2

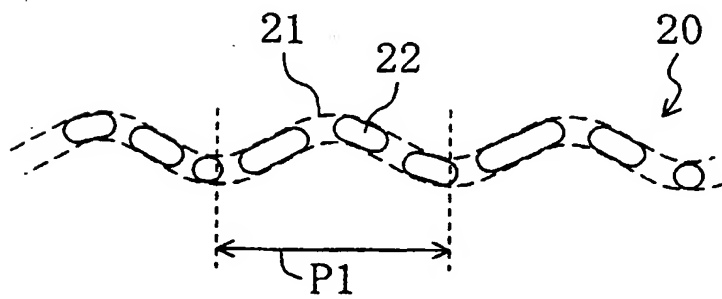


Fig. 3

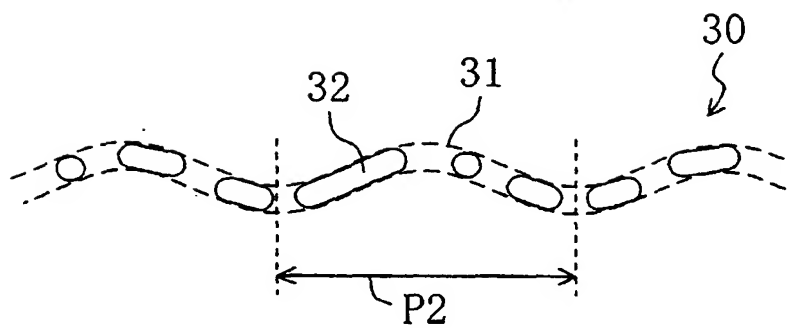


Fig. 4

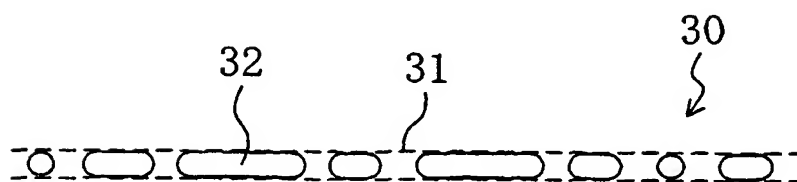


Fig. 5

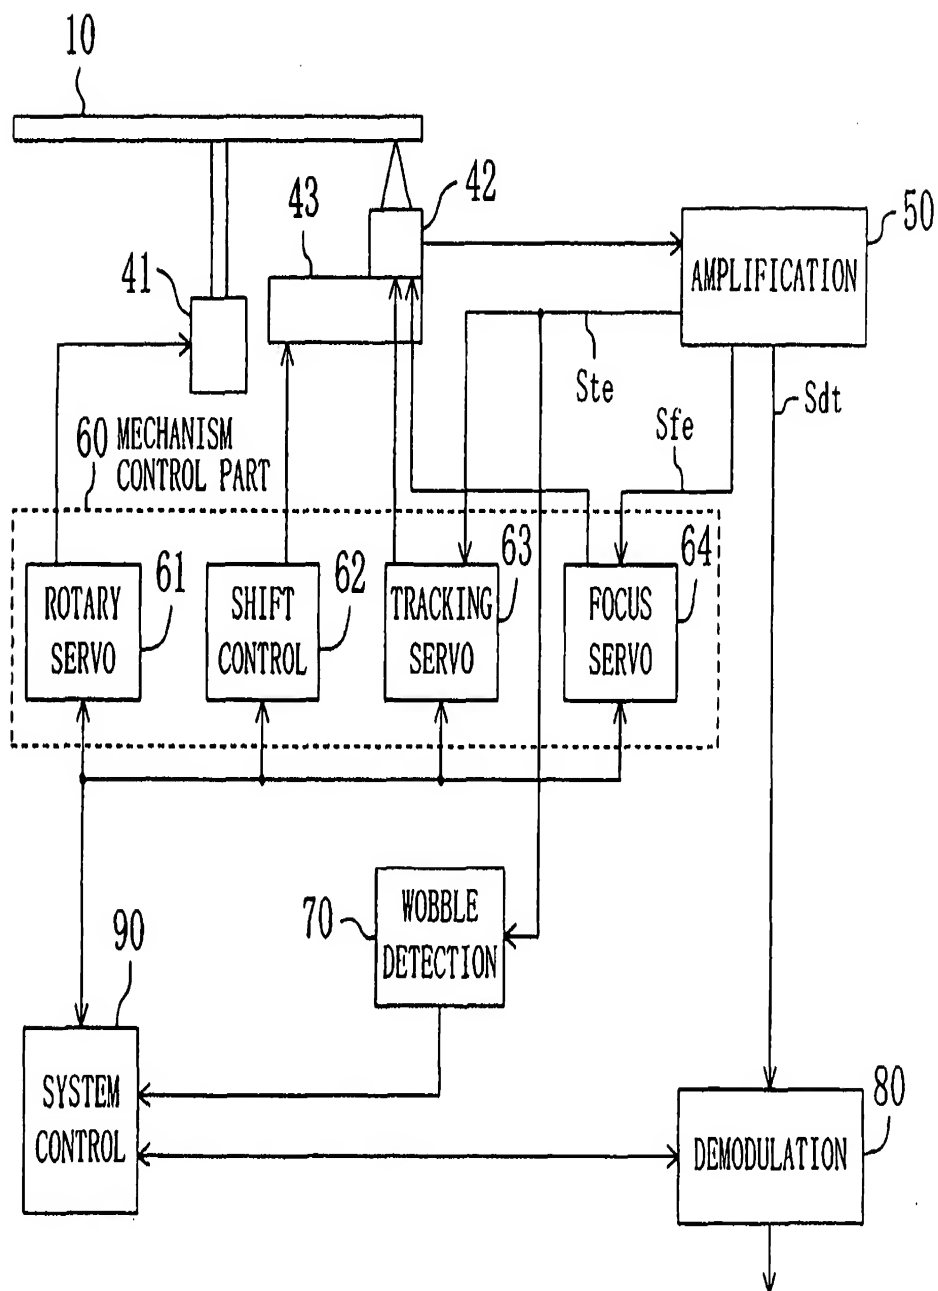


Fig. 6

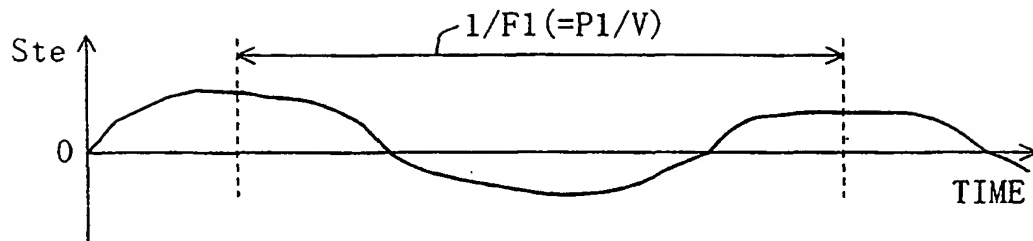


Fig. 7


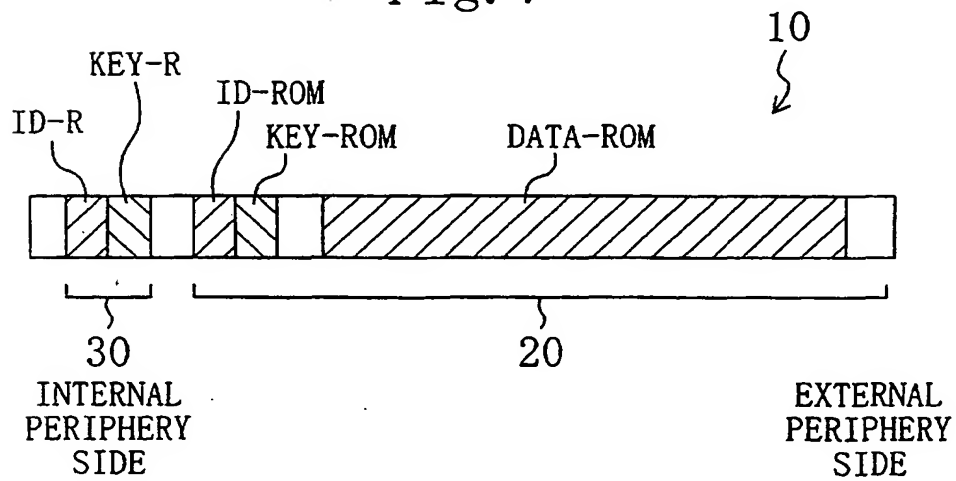


Fig. 8

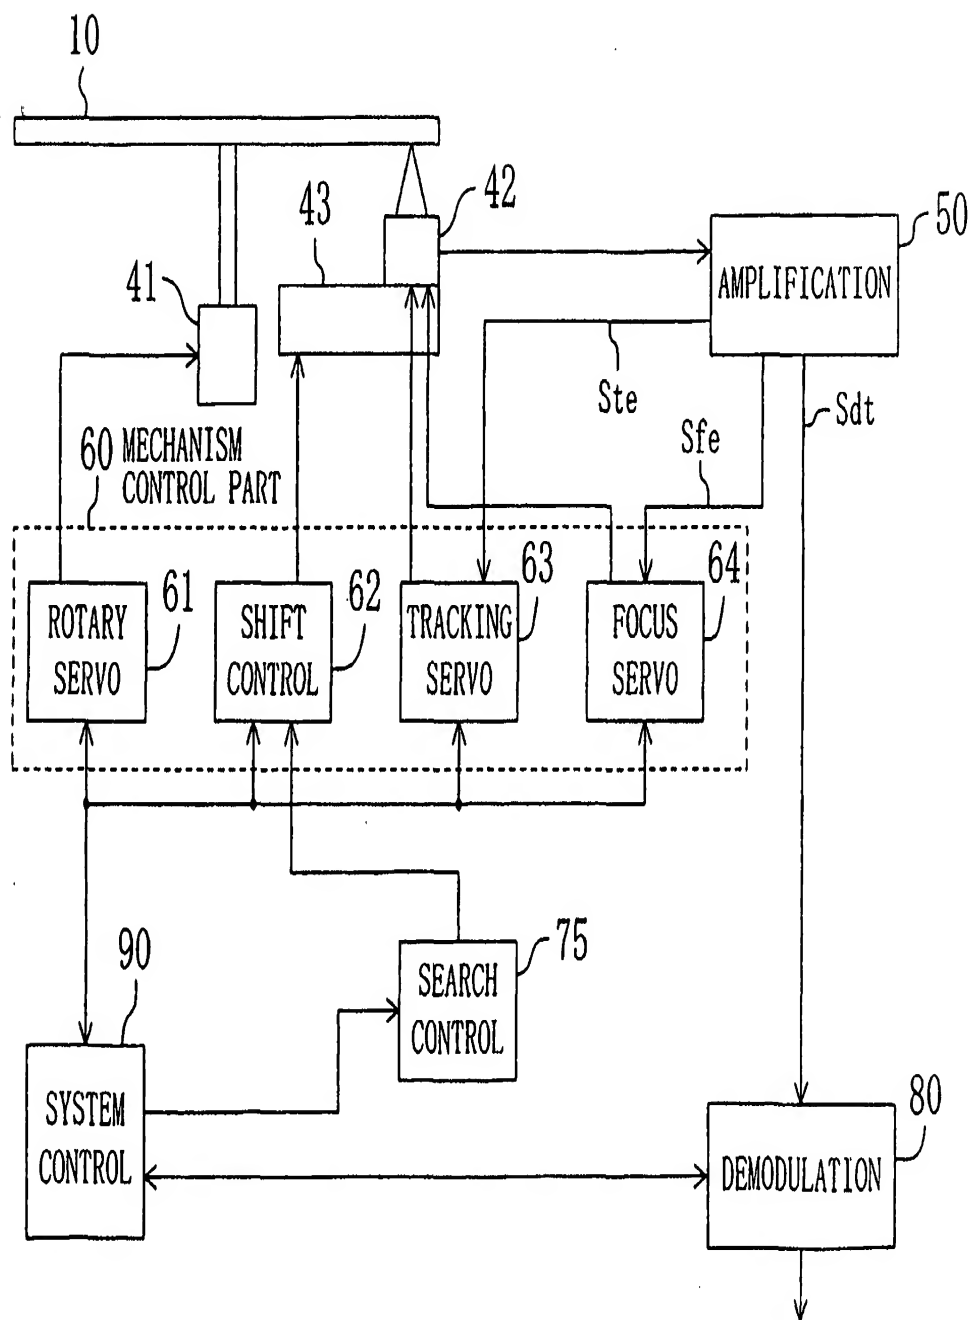

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP99/04083

A. CLASSIFICATION OF SUBJECT MATTER Int.Cl. ⁶ G11B7/007, G11B7/00, G11B7/24, G11B19/04, G11B20/10 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) Int.Cl. ⁶ G11B7/007, G11B7/00, G11B7/24, G11B19/04, G11B20/10 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1922-1996 Toroku Jitsuyo Shinan Koho 1994-1999 Kokai Jitsuyo Shinan Koho 1971-1999 Jitsuyo Shinan Toroku Koho 1996-1999 Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	Microfilm of the specification and drawings annexed to the request of Japanese Utility Model Application No. 63-79435 (Laid-open No. 2-5111) (Sony Corp.), 12 January, 1990 (12. 01. 90), Full text (Family: none)	1, 3
Y		2
A		4-11
Y	JP, 8-153342, A (Victor Co. of Japan, Ltd.), 11 June, 1996 (11. 06. 96), Full text (Family: none)	2
A		4-11
A	JP, 9-81938, A (Matsushita Electric Industrial Co., Ltd.), 28 March, 1997 (28. 03. 97), Full text (Family: none)	4-11
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document not published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "Z" document member of the same patent family		
Date of the actual completion of the international search 21 October, 1999 (21. 10. 99)		Date of mailing of the international search report 2 November, 1999 (02. 11. 99)
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer
Facsimile No.		Telephone No.

Form PCT/ISA/210 (second sheet) (July 1992)